

mato



Hose End Meters and Filling Guns for Lubricating Oil

Description	Images and specifications can be subject to change without notice	Part No.
-------------	---	----------

Oil Filling Gun with Protector and Swivel

Swivel and 2 double threaded connectors

1/2"-1/2" (male) &

1/2"-3/4" (male) included,

max. working pressure 100 bar

Oil filling gun without nozzle **35 400 36**

Oil filling gun with non-drip nozzle for engine oil **35 401 73**

Oil filling gun for gear oil without non-drip nozzle **35 402 27**

Oil filling gun for gear oil with non-drip nozzle **35 402 03**

Oil filling gun with hose and non-drip nozzle for engine oil **35 403 33**



Electronic Line Meter DIGIMET E35

Resettable with LCD Display.

For details and technical data see below

DIGIMET E35 in-line meter 1/2" female **35 410 02**

DIGIMET E35 in-line meter 1/2" male/female **35 410 19**

DIGIMET E35 in-line meter 3/4" male/female **35 410 33**



DIGIMET E35 Hose End Meter

Equipped with LCD display, swivel, with nozzle and oil filling gun,

maximum flow rate 35 l/min, 2 displays (totaliser and

resettable display of dispense), accuracy +/- 0.5 %,

with protector, calibratable,

with nipples for 1/2" and 3/4" outlets,

max. 100 bar, facility for flow rate metering

DIGIMET E35 hose end meter without nozzle **35 411 63**

DIGIMET E35 hose end meter with non-drip nozzle for engine oil **35 411 70**

DIGIMET E35 hose end meter for gear oil without non-drip nozzle **35 411 87**

DIGIMET E35 hose end meter for gear oil with non-drip nozzle **35 411 94**

DIGIMET E35 with hose and non-drip nozzle for engine oil **35 412 17**



Hose End Meters and Filling Guns for Lubricating Oil

Description

Images and specifications can be subject to change without notice

Part No.

DIGIMET E30 for Preset Delivery

Preset delivery from 0.1 to 99.9 litre,
automatic shut-off when preset volume reached,
accuracy +/- 0.5%, working pressure max. 67 bar,
swivel and double ended connector 1/2" - 3/4" male,
electronic LCD display



DIGIMET E30 Preset without extension

35 414 15

DIGIMET E30 Preset with non-drip nozzle for engine oil


35 414 22

DIGIMET E30 Preset for gear oil with non-drip nozzle

35 414 39

DIGIMET E30 Preset with hose and non-drip nozzle for engine oil

35 414 46

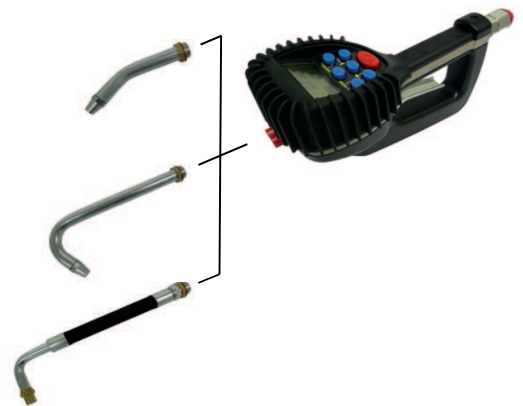

Electronic Hose End Meter , with swivel calibratable to legal measuring standards

Electronic hose end meter, designed to meet the European
Measurements Instrument Directive MID, based on **OIML R117**.
Unit features permanent data memory, resettable digital display,
max. working pressure 100 bar, flow range: 1 - 10 l/min.
Accuracy +/- 0.3% (8-2000 mPas), with double threaded
connectors 1/2" and 3/4" male.
(Producer calibration certificate included).

**Only MATO oil transfer systems that are configured with this
meter AND electric/pneumatic pump components made by
MATO meet the directives of MID!**



Electronic hose end meter MID, without nozzle

35 414 91

Electronic hose end meter MID,
with non-drip nozzle for engine oil


35 415 07

Electronic hose end meter MID,
for gear oil with non-drip nozzle

35 415 14

Electronic hose end meter MID,
with hose and non-drip nozzle for engine oil

35 415 21

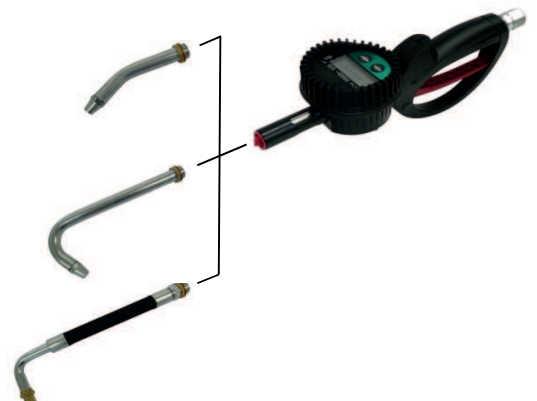

Hose End Meters for Various Liquids and Accessories for Meters

Description	Images and specifications can be subject to change without notice	Part No.
DIGIMET E35-AF Hose End Meter		
for anti-freeze and water based fluids		
Equipped with LCD display, swivel, with gun and non-drip nozzle, maximum flow rate 35 l/min, 2 displays (totaliser and resettable display of dispense), accuracy +/- 0.5 %, with protector, calibratable, with nipples for 1/2" and 3/4" outlets max. 100 bar, facility for flow rate metering		
Brake fluids and other fluids on request!		
DIGIMET E35-AF hose end meter with hose and non-drip nozzle		35 412 31
Electronic Line Meter DIGIMET E35-AF		
Resettable with LCD display, 5-digit, 1/2" inlets, for technical data see DIGIMET E35-AF hose end meter		
Electronic line meter DIGIMET E35-AF		35 410 71
DIGIMET E35-WS Hose End Meter		
for windscreen cleaner and AdBlue®		
Equipped with LCD display, 5-digit, PVC measuring chamber, viton seals, swivel and nozzle in stainless steel, flow rate 0.5l to 35 l/min. 2 displays (totaliser and resettable display of dispense), accuracy +/- 0.5 % calibratable, with R1/2" female thread, max. 10 bar, facility for Flow Rate Metering		
DIGIMET E35-WS hose end meter with non-drip nozzle		35 412 48
Accessories for Oil Filling Guns and Hose Meters		
Nozzle with non-drip nozzle for engine oil		35 402 58
Nozzle for gear oil without non-drip nozzle		35 402 72
Nozzle for gear oil with non-drip nozzle		35 402 65
Flexible hose with non-drip nozzle for engine oil		35 402 96
Inspection window for approved hose end meter		35 412 93
Straight swivel, 1/2" female / male		35 490 08
Double ended connector 1/2" - 1/2" male		39 912 03
Double ended connector 1/2" - 3/4" male		39 912 34
Rubber protector for hose end Meter and line meter		35 412 62

